

CP3™


AutoCoding®
Ready✓

The CP3™ is a fully automatic case packing system.

Our philosophy is to complete the retail packing line in exceptional time, with exceptional efficiency and light weight power consumption technology, delivering blistering performance with the CP3's compact footprint.

Capable of up to **120 packs** per minute with variable, quick-changeover tooling, we maintain Proseal's values within our case packing machinery solution.

At the core of the design is our tried and tested **ProMotion™** intelligent, non-stop, tray infeed system, with millions of miles now on the clock, it is an obvious vehicle to use for this crucial part of the packaging process. Allied to this efficiency principle is common Proseal spare parts, shared across our tray sealing and case packaging range, and other industry leading Proseal features.

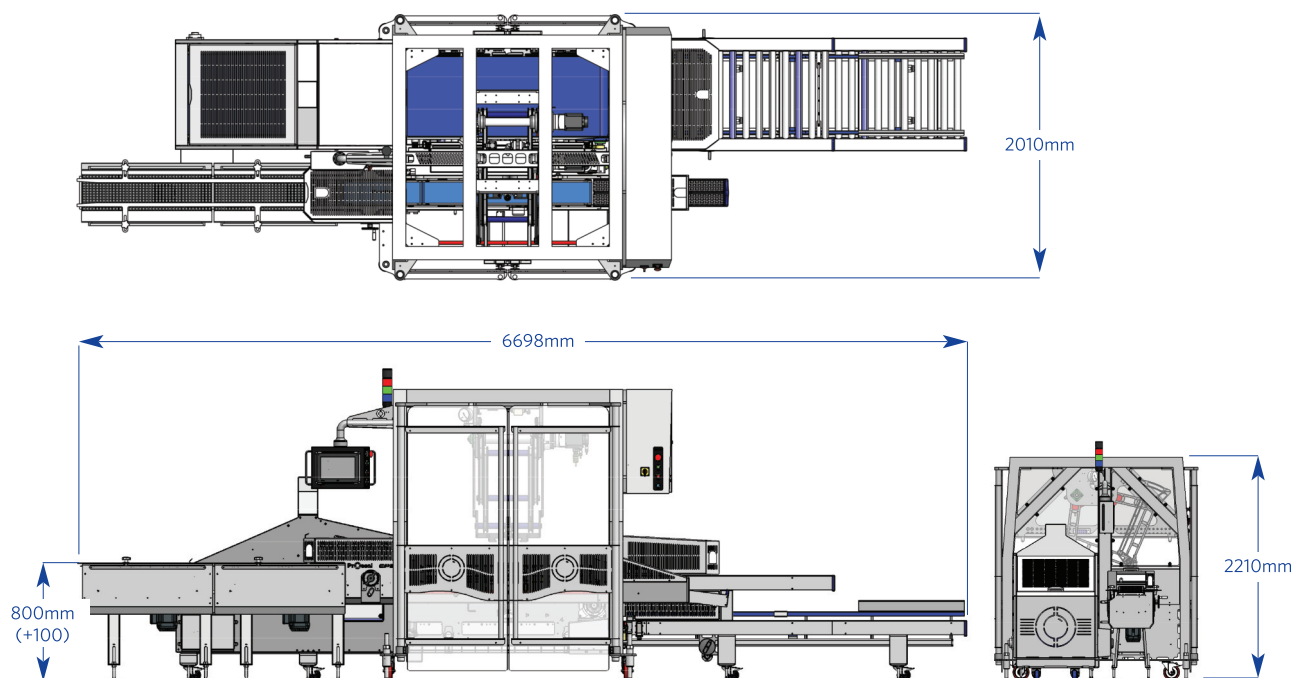

Standard design features and benefits

- **ProMotion™** - a high accuracy continuous motion tray infeed system, which increases production speed whilst reducing machine duty
- **ProTect™** - a contactless machine login and audit trail system
- **ProVision™** compatibility
- 1-2m Soft touch tray buffering conveyor
- Automatic filled crate discharge
- Auto tool technology for pack format changes
- 100m per hour vacuum pump supplied as standard
- User friendly, menu-driven control panel with step-by-step prompts, error and status displays, and useful batch pack counter
- Recipe driven auto machine set-up for tool change
- On-screen data capture and trends with wireless connection option
- **QRconveyors™** with quick release belts for easy hygiene and maintenance
- 2 Axis delta robotic operation
- Self-centering guides
- Compatible with modern board materials

Options available

- Pack orientating conveyor
- Bespoke crate delivery and discharge conveyors to fit into your complete factory layout
- Increased length of buffering conveyor for higher speeds
- Additional crates fill for higher speeds
- Integration of peripheral equipment, such as: case erectors, existing crate delivery system, labellers and coders.
- Multiple quick change end effector options
- **AutoCoding Ready** - **For more details see page 76**
- Sale, Lease Purchase and Rental options available



CP3™ Specifications

| | |
|-------------------|---------------------------------------|
| Height | 2210mm |
| Standard Length | length to customer's specification |
| Width | 2010mm |
| Weight | specification dependent |
| Electrical Supply | 415V 3 phase + neutral (fused at 16A) |

Transformers are available to accommodate the electrical supplies in different countries

Metric

| Pressure | Flow |
|----------|----------|
| 6 Bar | 226L/Min |

Imperial

| Pressure | Flow |
|----------|------|
| 87psi | 8CFM |



PORK | C-PET



PUDDINGS | A-PET



SANDWICHES | BOARD



BEVERAGE | A-PET



SOFT FRUIT | BOARD

for more information UK +44 (0) 1625 856 600 America +1 804 447 9038 Australia +61 (0) 3 9397 0955

www.proseal.com